

Estd. 1994

TOTAL SECURITY SOLUTIONS

OTHER PRODUCTS

Security :

STAND ALONE ALARMS
"HOME COP" Door Burglary Alarm
"SHUTTER COP" Shutter Alarm.
WIRELESS BURGLARY ALARM
Wireless system for home.
4 Zone Wireless system.

Industrial wireless system.
Wireless Fire Detection System.
Wireless Addressable
Fire Detection System
Expendable Range Wireless System.
Wireless Panic Alarm System.

WIRELESS SYSTEM ACCESSORY

Wireless door sensor.
Wireless Shutter Sensor.
Wireless P.I.R. Sensor.
Wireless Smoke Detector.
Wireless Addressable Smoke Detector.
Wireless Hooter.
Wireless Repeater.

ELECTRONIC CASH CARRYING BAGS

**ELECTRONIC SAFE
METAL DETECTORS**

Hand-Held Metal Detector.
Door Frame Metal Detector.

FAKE NOTE DETECTOR

Surveillance :

Indoor Camera
Day-Night Indoor Camera
Day-Night Out Door Camera
IP Camera
High Speed Dome Camera
Spy Camera
Switchers / Amplifier / Multiplexer
Stand alone DVR
DVR Card
Video Door Phone

Accessories :

Electro Magnetic Door Lock
Door Strick
Wired Sensors.

Automation :

Remote switch

Project Consultancy :

Complete Security Consultancy

WEB SITE :

www.hepl-india.com

Email :

sales@hepl-india.com

Response@hepl-india.com

**4 ZONE WIRELESS - REMOTE COP
TOTAL WIRELESS ALARM SYSTEM**



MODEL : 4 ZONE WIRELESS-REMOTE COP TECHNICAL SPECIFICATION

RECEIVER	Highly Stable P.L.L. Receiver
DECODING SECURITY	Electronic coding (2,62,144 combinations)
HOOTER	Inbuilt buzzer 110db/ External Hooter 115 db
HOOTER ON TIMER	Presetable as per customer need
COMMUNICATION	R.F. Link with Sensors/ Remote
SYSTEM PROTECTION	EMI / RFI Protection (NO FALSE ALARM)
SILENT TEST	YES As per R.B.I. Norms
OPERATING TEMPERATURE	-10 c to 55 c
SENSOR CONNECTIVITY	WIRELESS- Door/Shutter/P.I.R./Smoke
BATTERY BACK-UP	S.M.F BATTERY 6V/4Ah- 2Nos. (120 Hrs.)
BATTERY CHARGER	SMPS Constant voltage constant current
DIMENSION	H=180 x L=200 x W= 55 mm
CABINET	Strong powder coated body
REMOTE	Highly Stable SAW RESONATOR base
REMOTE -FUNCTIONS	System ON / OFF , Panic Alarm Activation
REMOTE RANGE	100 Mtrs.*
WIRELESS SENSOR CONNECTIVITY	Max. Door/ Window / Shutter Sensor : 75 Nos. Max. Passive infra-red sensor(P.I.R.) : 25 Nos. Max. Smoke Detectors : 20 Nos(Expandable up to 50)
ZONE / MODE	ZONE 1 : Emergency PANIC Alarm zone ZONE 2 : Emergency FIRE Alarm Zone ZONE 3 : SENSOR Zone ZONE 4 : SENSOR Zone
CERTIFICATIONS	SOCIETY FOR APPLIED MICROWAVE ELECTRONICS ENGINEERING & RESEARCH R & D Laboratory, Ministry of information technology Government of India

VERSATILE WIRELESS BURGLAR CUM FIRE ALARM SYSTEM. Suitable for Banks, Credit Societies, Jewelry Shops, Industries, Offices, Institutes, Labs and All types of Residential Premises etc. **SUITABLE FOR MULTIPLE ENTRIES**

Security :

STAND ALONE ALARMS

“HOME COP” Door Burglary Alarm
“SHUTTER COP” Shutter Alarm.

WIRELESS BURGLARY ALARM

Wireless system for home.

4 Zone Wireless system.

Industrial wireless system.

Wireless Fire Detection System.

Wireless Addressable

Fire Detection System

Expendable Range Wireless System.

Wireless Panic Alarm System.

WIRELESS SYSTEM ACCESSORY

Wireless door sensor.

Wireless Shutter Sensor.

Wireless P.I.R. Sensor.

Wireless Smoke Detector.

Wireless Addressable Smoke Detector.

Wireless Hooter.

Wireless Repeater.

ELECTRONIC CASH BAGS

ELECTRONIC SAFE

METAL DETECTORS

Hand-Held Metal Detector.

Door Frame Metal Detector.

FAKE NOTE DETECTOR

Surveillance :

Indoor Camera

Day-Night Indoor Camera

Day-Night Out Door Camera

IP Camera

High Speed Dome Camera

Spy Camera

Switchers / Amplifier / Multiplexer

Stand alone DVR

DVR Card

Video Door Phone

Accessories :

Electro Magnetic Door Lock

Door Strick

Wired Sensors.

Automation :

Remote switch

Project Consultancy :

Complete Security Consultancy


WEB SITE :

www.hepl-india.com

Email :

sales@hepl-india.com

Response@hepl-india.com

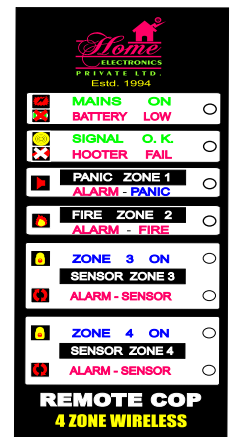

4 ZONE - WIRELESS CONTROL PANEL

It is an versatile wireless security alarm, Which is suitable for residential & commercial premises. Main control panel can be install in side the premises at suitable location. Just plug with mains supply that's finish. Unit is having it's own rechargeable SMF battery (6V / 4Ah -2 Nos) which can stand upto 6 days w/o electric supply. We are providing 2 remotes along with the unit. You can activate(arm) or deactivate (disarm) the system from outside the premises. **You can disarm one zone (internal sensors) and activate another zone (External sensors) through REMOTE.**

In case of emergency, you can activate alarm with the help of remote. Range is 100Mtrs.

Wireless Sensors, Like DOOR SENSOR, SHUTTER SENSOR, HUMAN BODY DETECTORS, SMOKE DETECTORS can be couple with the main unit through R.F. link.

NO WIRING IS REQUIRED with unit & sensors. All sensors & remotes are highly stable & secured.

WE CAN GIVE GUARANTEE ABOUT "NO FALSE ALARM"

WIRELESS DOOR SENSOR

The magnetic wireless sensor can be use as a DOOR SENSOR ; WINDOW SENSOR ; SHUTTER SENSOR
It transmit the coded signal to main control panel.

Transmitter power is 8M.W.

Transmitter is based on SAW RESONATOR. It provides highly stability.

Operating voltage : 12V.D.C.

Battery Type : 12V - A23 Alkaline.

Battery life : 1 year*



WIRELESS PASSIVE INFRA-RED (PIR) SENSOR

The PIR sensor is a human body movement detector. It can be install at high risk area, inside of the premises.

SCANNING DEGREE : 110

SCANNING DISTANCE : 10Mtrs.

TRANSMITTER SAW RESONATOR

TRANSMITTER POWER 8 MW.

OPERATING VOLTAGE 3V.DC.

BATTERY TYPE 1.5V Alkaline - 2 Nos.

BATTERY LIFE 1 Year*



WIRELESS SMOKE DETECTOR

The WIRELESS SMOKE DETECTOR It can be install at high fire risk area, inside of the premises.

SCANNING AREA : 10 Sq. FEET

TRANSMITTER SAW RESONATOR

TRANSMITTER POWER 8 MW.

OPERATING VOLTAGE 3V.DC.

BATTERY TYPE 1.5V Alkaline - 2 Nos.

BATTERY LIFE 1 Year*



9 TELEPHONE Nos. AUTO DIALER

The 9T2M AUTO DIALER is micro controller based fully automatic dialing machine. It can be couple in between MAIN CONTROL PANEL & TELEPHONE LINE. You can store 9 telephone nos. And 2 messages of 20 seconds through auto programmer.

TELEPHONE Nos. 9 Nos. (UP TO 16 DIGITS)

MESSAGE 2 Nos (BURGLAR & FIRE)

MESSAGE DURATION 20 Seconds Each

OPERATING VOLTAGE 12V.DC.

